LMA®

ELSEA GROUP MADE IN ITALY

THE FUTURE OF GRINDING

PROFESSIONAL VACUUM CLEANER



Rev. 9th October 2025

Index

INDUSTRIAL VACUUM CLEANER pag. 2

PROFESSIONAL VACUUM CLEANER pag. 5

PROFESSIONAL STEAM CLEANER pag. 9

PROFESSIONAL FLOOR SCRUBBER pag. 17



THE FUTURE OF GRINDING

Dusty clean T 1.00 is a vertical three-phase industrial vacuum cleaner provided with a mobile dust tank, easy to remove and easy to handle because of its wheels. The tough structure includes a spacious accessory case. It is provided with manual filter shaker. The vacuum gauge on the head shows when the filter is dirty.

	DUSTY CLEAN T1.00	DCV100PE
Number motors	Numero motori	1
Motor type	Tipo di motore	turbine 400V-50Hz
Stage	Stadi motori	single
P max (kW)	P max (kW)	3,0 threephase
IP Protection	Protezione IP	54
Tank material	Materiale ccontenitore	inox 304
Total tank capacity (lt)	Capacità tot. fusto (lt)	100
Waterlift (mm H_2O)	Depressione (mmH_2O)	2800
Air flow (m^3/h)	Aria aspirata (m^3/h)	330
Total filtering surface (cm^2)	Superficie filtrante (cm^2)	18000
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	69
Filter shaker	**Scuotifiltro**	**automatic**

Standard Accessories and Filters

	DESCRIPTION	CODE
1	Cartridge filter H14 Ø370 - H305 washable	**FI370305**





Options

KIT40FOVN [2-8]

	DESCRIPTION	CODE
2	Complete flexible hose 5mt. Ø40	**ACTF385VN**
3	Crevice tool Ø40	**ACLP040**
4	Dusting brush Ø40	**ACPE040**
5	Nozzle body A/P L400 Ø40	**ACCS400A/P**
6	Slide-on for floor nozzle L400	**ACIP400**
7	Chrome extension wand Ø40	**ACTC038D**
8	Chrome curved extension wand male Ø40	**ACTC038C**

Options

KIT50FOVN [9-15]

	DESCRIPTION	CODE
9	Complete flexible hose 5mt. Ø50	**ACTF50C5VN**
10	Crevice tool Ø50	**ACLP050**
11	Chrome curved extension wand male Ø50	**ACTS050**
12	Triangle nozzle Ø50	**ACBO050T**
13	Nozzle body A/P L400 Ø50	**ACCS40050DAV**
14	Slide-on for floor nozzle L400	**ACIP400DAV**
15	Dusting brush Ø50	**ACPE050**































Rev. 15th September 2025



THE FUTURE OF GRINDING

Dusty clean 3.50 bag our robust single-phase vacuum cleaner equipped with tubular collection bag, quick to remove and handy for easy and safe disposal. The solid industrial structure includes a space for accessories. Equipped with 2 or 3 motors, thanks to the extensive filter surface and the shaker filter, Dusty clean 3.50 bagguarantees high performance. The vacuum meter placed on the head shows when the filter is dirty. The collection bag has an autonomy of 23mt.

	DUSTY CLEAN 3.50 BAG	DCV350BGE
Number motors	Numero motori	3
Stage	Stadi motori	double
Volt (V)	Volt (V)	220-240
Frequency (Hz)	Frequenza (Hz)	50/60
Cooling	Tipo raffreddamento	By pass
P max (W)	P max (W)	3600
P (W)	Potenza (W)	3150
Filter shaker	Scuotifiltro	**YES**
Waterlift (mm H_2O)	Depressione (mmH_2O)	2400
Air flow (m^3/h)	Aria aspirata (m^3/h)	645
Total filtering surface (cm^2)	Superficie filtrante (cm^2)	6300
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	68
Total tank capacity (lt)	Capacità tot. fusto (lt)	**BAG**
Weight (Kg)	Peso (Kg)	48

Standard Accessories and Filters

	DESCRIPTION	CODE
1	Cartridge filter H14 Ø250 - H260 washable	**FI250260HL**
2	Super strong Vega Bag 23mt	**CPRS001**

Options

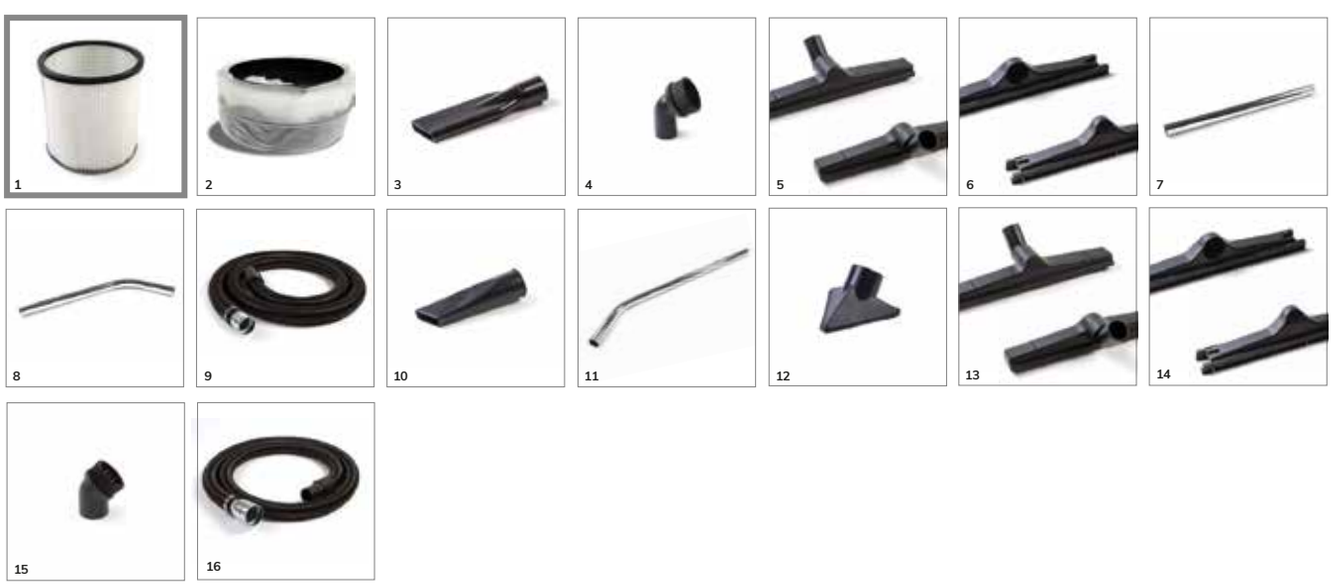
	DESCRIPTION	CODE
3	Crevice tool Ø40	**ACLP040**
4	Dusting brush Ø40	**ACPE040**
5	Nozzle body A/P L400 Ø40	**ACCS400A/P**
6	Slide-on for floor nozzle L400	**ACIP400**
7	Chrome extension wand Ø40	**ACTC038D**
8	Chrome curved extension wand male Ø40	**ACTC038C**





Options

	DESCRIPTION	CODE
9	Complete flexible hose Ø50	**ACTF50C5VN**
10	Crevice tool Ø50	**ACLP050**
11	Chrome curved extension wand male Ø50	**ACTS050**
12	Triangle nozzle Ø50	**ACBO050T**
13	Nozzle body A/P L400 Ø50	**ACCS40050DAV**
14	Slide-on for floor nozzle L400	**ACIP400DAV**
15	Dusting brush Ø50	**ACPE050**
16	Complete flexible hose mt. 5 Ø40	**ACTF385VN**



Rev. 15th September 2025



THE FUTURE OF GRINDING

The DUSTY CLEAN 1.14 PLUG-IN is our professional vacuum cleaner designed for construction sites, workshops, car body shops and all craftsmen activities. The vacuum clenaer is equipped with a large filtering surface and has an excellent working autonomy with all kind of fine and humid dust. When the HEPA filters are clogged, it is possible to clean them automatically without interruptions. The electronic system guarantees a soft start mode for starting the suction motor and the automatic switch-off when the tank is full of liquids, in addition to the AUTOMATIC STARTER used with the electric

DUSTY CLEAN 1.14 PLUG-IN	DCV1.14PIE
Motors number	1
Stage	double
Volt (V)	220 - 240
Frequency (Hz)	50 / 60
Cooling	HI-speed by pass
P max vacuum (W)	1400
P max tool (W)	2000
Pressure min - max (bar)	NO
Waterlift (mbar)	245
Air flow (l/s)	56
Lpa sonorus 3mt(dB(A))	67
Total tank capacty (lt)	35
Power cord lenght (m)	8,5
Power cord type	H07rn-f 3x1,5
Weight (Kg)	17,5
Machine dimension(PxLxH)	57x39x58,5
Box dimension(PxLxH)	58x40x65

Standard Accessories and Filters

	DESCRIPTION	CODE
1	Inlet coupling Ø38	**20040**
2	Coupling accessories	**ACMA048A**
3	Hepa filter PTFE XTOOL (2pcs)	**FI1890XT**
4	Hepa bag XTOOL	**FIHXT**

Options

	DESCRIPTION	CODE
5	Complete flexible hose Ø40	**ACTX038**
6	Crevice tool Ø40	**ACLP040**
7	Chrome extension wand Ø40	**ACTC038CF**
8	Chrome curved extension wand-male Ø40	**ACTC038C**
9	Dry floor nozzle L400mm	**ACCS400F**
10	Wet floor nozzle L400mm	**ACCV400F**
11	Dusting brush Ø40	**ACPE040**


1


2


3


4


5


6


7


8


9


10


11

Rev. 9th October 2025



THE FUTURE OF GRINDING

Wet & dry vacuum cleaner with one, two or three double stage motors till reaching 3600W maximum power. Provided with tipping trolley for an easy empting of dirty liquids this model is ideal for professional cleaning. Available with polypropiline 76 litres tank cleaning.

PROLINE PL 3.77 BASCULANTE	ASPPL3.77BSCE
Numero motori	3
Stadi motori	double
Volt (V)	220 - 240
Frequenza (Hz)	50 / 60
Tipo raffreddamento	by pass
P max (W)	3300
Potenza (W)	2900
Depressione (mmH_20)	2250
Aria aspirata (m^3/h)	510
Lpa sonoro 3mt (dB(A))	68
Capacità tot. fusto (lt)	77
Peso (Kg)	27,0

Accessori e filtri standard

	DESCRIZIONE	CODICE
1	Tubo flessibile mt. 2,5 Ø40	ACTF38/2,5/CN
2	Lancia piatta Ø40	ACLP040
3	Tubo prolunga curva femmina Ø40	ACTC038CF
4	Tubo prolunga curva maschio Ø40	ACTC038C
5	Ventosa fissa L400 liquidi	ACCV400F
6	Ventosa fissa L400 polvere	ACCS400F
7	Pennello Ø36	ACPE040
8	Filtro poliestere con anello Ø440	FA044P
9	Cappuccio liquidi	ACCA165A





60 x 60 x 106 H cm


1


2


3


4


5


6


7


8


9

Rev.15th August 2025



THE FUTURE OF GRINDING

Wet&Dry Vacuum Cleaner with three double stage motors till reaching 3600W maximum power. This model is ideal for professional cleaning. Available with polypropiline 76 litres tank cleaning.

PRO LINE 3.77 PLAST MARKET | ASPPL3.77MKTE

Numero motori	3
Stadi motori	double
Volt (V)	220 - 240
Frequenza (Hz)	50 / 60
Tipo raffreddamento	by pass
P max (W)	3300
Potenza (W)	2900
Depressione (mm$H_2$0)	2250
Aria aspirata (m^3/h)	510
Lpa sonoro 3mt (dB(A))	68
Capacità tubo fusto (lt)	77
Peso (Kg)	26,0

PROFESSIONAL VACUUM CLEANER

Accessori e filtri standard

	DESCRIZIONE	CODICE
1	Tubo flessibile mt. 2,5 Ø40	**ACTF38/2,5/CN**
2	Lancia piatta Ø40	**ACLP040**
3	Tubo prolunga curva femmina Ø40	**ACTC038CF**
4	Tubo prolunga curva maschio Ø40	**ACTC038C**
5	Ventosa fissa L400 liquidi	**ACCV400F**
6	Ventosa fissa L400 polvere	**ACCS400F**
7	Pennello Ø36	**ACPE040**
8	Filtro poliestere con anello Ø440	**FA044P**
9	Cappuccio liquidi	**ACCA165A**
10	Kit scarico	**ACKI028**



60 x 60 x 96 H cm


1


2


3


4


5


6


7


8


9


10

Rev. 15th September 2025



THE FUTURE OF GRINDING

Wet&Dry Vacuum Cleaner with three double stage motors till reaching 3600W maximum power. This model is ideal for professional cleaning. Available with polypropiline 76 litres tank cleaning.

PROLINE PL 3.77 PLAST	ASPPL3.77E
Numero motori	3
Stadi motori	double
Volt (V)	220 - 240
Frequenza (Hz)	50 / 60
Tipo raffreddamento	by pass
P max (W)	3300
Potenza (W)	2900
Depressione (mm$H_2$0)	2250
Aria aspirata (m^3/h)	510
Lpa sonoro 3mt (dB(A))	68
Capacità tot. fusto (lt)	77
Peso (Kg)	24,0

Accessori e filtri standard

	DESCRIZIONE	CODICE
1	Tubo flessibile mt. 2,5 Ø40	**ACTF38/2,5/CN**
2	Lancia piatta Ø40	**ACLP040**
3	Tubo prolunga curva femmina Ø40	**ACTC038CF**
4	Tubo prolunga curva maschio Ø40	**ACTC038C**
5	Ventosa fissa L400 liquidi	**ACCV400F**
6	Ventosa fissa L400 polvere	**ACCS400F**
7	Pennello Ø36	**ACPE040**
8	Filtro poliestere con anello Ø440	**FA044P**
9	Cappuccio liquidi	**ACCA165A**



60 x 60 x 96 H cm


1


2


3


4


5


6


7


8


9

Rev. 15th September 2025



THE FUTURE OF GRINDING

Wet & dry vacuum cleaner with a double stage motor. It is available with polypropiline 37 litres tank.

PROLINE PL1.37 PLAST	ASPPL1.37E
Numero motori	1
Stadi motori	double
Volt (V)	220 - 240
Frequenza (Hz)	50 / 60
Tipo raffreddamento	by pass
P max (W)	1400
Potenza (W)	1200
Depressione (mmH_20)	2400
Aria aspirata (m^3/h)	215
Lpa sonoro 3mt (dB(A))	60
Capacità tot. fusto (lt)	37
Peso (Kg)	13,7

Accessori e filtri standard

	DESCRIZIONE	CODICE
1	Tubo flessibile mt. 2,5 Ø40	**ACTF38/2,5/CN**
2	Lancia piatta Ø40	**ACLP040**
3	Tubo prolunga curva femmina Ø40	**ACTC038CF**
4	Tubo prolunga curva maschio Ø40	**ACTC038C**
5	Ventosa fissa L400 liquidi	**ACCV400F**
6	Ventosa fissa L400 polvere	**ACCS400F**
7	Pennello Ø36	**ACPE040**
8	Filtro poliestere con anello Ø340	**FA034P**
9	Cappuccio liquidi	**ACCA165A**



40 x 40 x 81 H cm


1


2


3


4


5


6


7


8


9

THE FUTURE OF GRINDING



GENIUS CAR VAPOR, the most versatile model in the Elsea multifunction steam/suction range. With its automatic charging boiler with a pressure of 10 bar, stainless steel case containing a suction unit with a two-stage 1400W motor, Steam Plus can combine the steam function with additional simultaneous water (hydrojet) and detergent (chemical) dispensing functions for an exceptionally effective cleaning and sanitising capacity.









GENIUS CAR VAPOR | GVGCV03E	
Alimentazione / Power	230V - 50Hz
Capacità caldaia / Boiler capacity	3,5 lt
Potenza caldaia / Boiler power	2000 + 1200 W
Pressione di esercizio / Working pressure	10 BAR
Produzione vapore kg/h / Steam production kg/h	6,0 kg/h
Temperatura vapore in caldaia / Steam temperature in the boiler	180°
Serbatoio acqua / Water tank	5 lt
Serbatoio detergente / Detergent tank	5 lt
Pmax aspiraliquidi bistadio / Pmax vacuum double stage	1400 W
Capacità serbatoio inox / Stainless tank capacity	22 lt
Peso (kg) / Weight (kg)	45 Kg



60 x 60 x 106H cm

Rev. 15th September 2025

Standard Accessories



ACTV029V21
Steam hose 3m



ACMT036V
Terminal steam hose



ACPE010VV
Little brush steam hose



ACTA036VA21
Steam-Vacuum hose 3m



ACMT036VA
Terminal steam-vacuum hose



ACPE010VA
Little brush steam-vacuum hose



ACCS150V
Steam manual body brush



ACIL150V
Slide-on for liquids manual nozzle



ACIP150V
Slide-on brush manual nozzle



ACLP036
Crevice tool Ø36



ACPE036
Dusting brush Ø36



ACBO036
Little nozzle Ø36



ACSP150
Radiator brush



ACTP037VM
Steam extension wand



ACCS300V
Steam body nozzle L 300



ACIP300V
Slide-on brush for floor steam nozzle L 300



ACIL300V
Slide-on for liquids steam nozzle



ACIT300V
Slide-on for carpet steam nozzle



ACBL100POV4
Armachair steam nozzle



ACBL225VS
Steam nozzle carpet tool



ACCA165A
Sponge filter

Options



ACTR185C
Charging hose Ø18,5mm L 1,5m + funnel



ACSP500SP21
Steam brush for cleaning seats and dress



FA034PP
Polyester filter with ring Ø36



ACTV250
Steam/Vacuum brush for glass 250mm



KIT029CG
Kit for chewing gum removal

PROFESSIONAL STEAM CLEANER

Rev. 15th September 2025



CLEAN VAPOR MAX is the largest model steam/suction range, with a powerful suction unit with two double stage motors. The boiler features automatic charging, generates a maximum pressure of up to 9 bar and ca be used in combination with the steam/detergent function to guarantee an exceptionally effective cleaning capacity. Steam Poseidon has a robust trolley case with industrial wheels that can wthstand extreme handling in all operating environments



CLEAN VAPOR MAX | GVCVL01MXE

Alimentazione / Power	230V - 50Hz
Capacità caldaia / Boiler capacity	2,2 lt
Potenza caldaia / Boiler power	2000 W
Pressione di esercizio / Working pressure	9 BAR
Produzione vapore kg/h / Steam production kg/h	6,0 kg/h
Temperatura vapore in caldaia / Steam temperature boiler	165°
Pmax aspiraliquidi / Pmax vacuum	2050 W
Capacità serbatoio inox / Stainless tank capacity	60 lt
Capacità serbatoio acqua / Water tank capacity	5,0 lt
Peso (kg) / Weight (kg)	36 kg



60 x 60 x 106H cm

Standard Accessories



ACTA036VN
Steam-Vacuum hose 3m



ACMT036VA
Terminal steam-vacuum hose



ACPE010VA
Little brush steam-vacuum hose



ACPE010VDOT
Little brush steam-vacuum hose brass



ACPE010VDIN
Little brush steam-vacuum hose inox



ACTF38/2,5/CN
Complete flexible hose mt.2,5 ø40



ACCS150V
Steam manual body brush



ACIL150V
Slide-on for liquids manual nozzle



ACIP150V
Slide-on brush manual nozzle



ACLP036
Crevice tool Ø36



ACPE036
Dusting brush Ø36



ACTP037VM
Steam extension wand



ACCS300V
Steam body nozzle L 300



ACIP300V
Slide-on brush for floor steam nozzle L 300



ACIL300V
Slide-on for liquids steam nozzle



ACIT300V
Slide-on for carpet steam nozzle



ACBL100POV4
Armachair steam nozzle



ACCA165A
Sponge filter



FI250178PZN
Polyester cartridge filter Ø250 -H178

Options



ACTV029V3
Steam hose 3m



ACMT036V
Terminal steam hose



ACPE010VV
Little brush steam hose



ACPV200UO
Terminal steam hose brass



ACTV250
Steam/Vacuum brush for glass 250mm



ACSP500S
Steam brush for cleaning seats and dress

PROFESSIONAL STEAM CLEANER

Rev. 15th September 2025

THE FUTURE OF GRINDING

CLEAN VAPOR JUNIOR : the most compact model in the Elsea steam/suction range. With its automatic charging boiler with a pressure of 6 bar and stainless steel case containing a suction unit with a two-stage 1400W motor, CLEAN VAPOR JUNIOR guarantees an exceptionally effective cleaning and sanitising capacity. Steam Wave has a 3lt stainless steel boiler with built-in double heating element for a power of up to 2200W. Automatic water charging in the boiler gives it an extended continuous uptime. It has an 8lt water tank (boiler charging) built into the trolley with castors, as well as a 20lt dirtrecovery tank. The control panel includes a steam adjustment knob. Numerous accessories can cover a wide range of cleaning tasks in all application sectors.





CLEAN VAPOR JUNIOR | GVCVL01E

Alimentazione / Power	230V - 50Hz
Capacità caldaia / Boiler capacity	3,0 lt
Potenza caldaia / Boiler power	2200 W
Pressione di esercizio / Working pressure	6 BAR
Produzione vapore kg/h / Steam production kg/h	4,0 kg/h
Temperatura vapore in caldaia / Steam temperature in the boiler	140°
Pmax aspiraliquidi bistadio / Pmax vacuum double stage	1400 W
Capacità serbatoio inox / Stainless steel tank capacity	22 lt
Capacità serbatoio riserva acqua / Water tank capacity	8,0 lt
Peso (kg) / Weight (kg)	22 Kg



40 x 40 x 81 H cm

Standard Accessories



ACTV029V3
Steam hose 3m



ACMT036V
Terminal steam hose



ACPE010VV
Little brush steam hose



ACTA036V3D
Steam-Vacuum hose 3m



ACMT036VA
Terminal steam-vacuum hose



ACPE010VA
Little brush steam-vacuum hose



ACPE036
Dusting brush Ø36



ACCS150V
Steam manual body brush



ACIL150V
Slide-on for liquids manual nozzle



ACIP150V
Slide-on brush manual nozzle



ACLP036
Crevice tool Ø36



ACBO036
Little nozzle Ø36



ACSP150
Radiator brush



ACTP037VM
Steam extension wand



ACCS300V
Steam body nozzle L 300



ACCA165A
Sponge filter



ACIP300V
Slide-on brush for floor steam nozzle L 300



ACIL300V
Slide-on for liquids steam nozzle



ACIT300V
Slide-on for carpet steam nozzle



ACBL100POV4
Armachair steam nozzle



ACBL225VS
Steam nozzle carpet tool

Options



ACTR185C
Charging hose Ø18,5mm L 1,5m + funnel



FA034PP
Polyester filter with ring Ø36



ACTV250
Steam/Vacuum brush for glass 250mm



ACSP500S
Steam brush for cleaning seats and dress



ACPE010VVOT
Steam brush - Brass bristles



ACPE010VVIN
Steam brush - Stainless Steel Bristles



ACPE010VDOT
Steam/Vacuum Little Brush - Brass Bristles



ACPE010VDIN
Steam/Vacuum Little Brush - Stainless Steel Bristles



ACPV200UO
Terminal Steam Hose L200mm with Brass Nozzle

PROFESSIONAL STEAM CLEANER



CLEAN VAPOR UNWAX is the most compact of the LMA steam generator models with automatic charging and a boiler pressure of up to 10 bar for fast, effective cleaning. Its 304 stainless steel and white painted steel case and wide range of accessories and options ensure fast, effective cleaning processes in accordance with HACCP self-assessment rules









CLEAN VAPOR UNWAX | SV010SE

Alimentazione / Power	220 - 240V -50/60Hz
Capacità caldaia / Boiler capacity	3,0 lt
Potenza caldaia / Boiler power	2000 W + 1200W
Tempo di riscaldamento / Heating time	10 min
Pressione di esercizio / Working pressure	10 BAR
Produzione vapore kg/h / Steam production kg/h	6,0 kg/h
Regolazione vapore / Steam Regulator	si / yes
Temperatura vapore in caldaia / Steam temperature in the boiler	185°
Ricarica caldaia / Charging Boiler	Automatica / Automatic
Capacità serbatoio acqua / Water tank capacity	2 lt
Materiale struttura / Case Material	*acciaio inox 304 / stainless steel 304
Peso (kg) / Weight (kg)	11,2 kg
Lunghezza cavo / Cable lenght	5,5 m
Dimensioni (PxLxH) / Dimension (PxLxH)	355x410x355 mm



52 x 40 x 47 H cm

Standard Accessories



ACTV029V3
Steam hose 3m



ACMT036V
Terminal steam hose



ACPE010VV
Little brush steam hose



ACPV200UO
Terminal steam hose brass

Options



ACPE010VVOT
Steam brush -
Brass bristles



ACPE010VVIN
Steam brush -
Stainless Steel Bristles



ACPV049
Steam pipe
extension 490mm



ACST029C
Triangle steam brush



ACSV270C
Steam brush



ACTV230V
Manual steam squeegee



ACSP500S
Steam brush for cleaning
seats and dress



KIT029CG
Kit for chewing gum
removal



ACNE150V
Detergent nebulizer



ACMO029
Triangle MOP



ACMO270
Steam brush MOP



CMMA007/C
Complete Trolley with
Accessories Basket

PROFESSIONAL STEAM CLEANER

NIKY85

The ride-on scrubber machie with wash track sizes, 850mm, is suitable for use in medium and large areas. The 145-liter solution tank has 30% more capacity than similarsized machines already on the market. It is sturdy, easy to use, highly manageable, designed down to the smallest details to ensure the best efficiency of cleaning performances.



cod. NIK85BT

max speed 6 Km/h

3,5 h

65 dB

		NIK85BT	NIK85BTC	NIK85BTCB	NIK85BTCLI LiFePo4
Alimentazione	Power	24V	24V	24V	25,6V
Larghezza lavoro (mm)	Total cleaning (mm)	885	885	885	885
Larghezza aspirazione (mm)	Vacuum width (mm)	1100	1100	1100	1100
Diametro spazzola (mm)	Brush diameter (mm)	2 x 430	2 x 430	2 x 430	2 x 430
Pressione Spazzola (Kg)	Brush pressure (Kg)	22-48	22-48	22-48	22-48
Motore aspirazione (W)	Vacuum motor (W)	500	500	500	500
Motore spazzola (Nr/W)	Brush motor (Nr/W)	2x 400W	2x 400W	2x 400W	2x 400W
Velocità giri spazzola (rpm)	Rpm speed brush (rpm)	130	130	130	130
Pressione specifica (gr/cm²)	Brush pressure (gr/cm²)	from 22 to 48	from 22 to 48	from 22 to 48	from 22 to 48
Rendimento orario (m^2/h)	Cleaning capacity (m^2/h)	5000	5000	5000	5000
Trazione (W/Nr)	Traction (W/Nr)	1 x 600	1 x 600	1 x 600	1 x 600
Serbatoio soluzione (tl)	Solution tank (tl)	145	145	145	145
Serbatoio recupero (tl)	Recovery tank (tl)	160	160	160	160
Pendenza max. a pieno carico (%)	Max incline at full charge (%)	8	8	8	8
L x P x H (mm)	L x P x H (mm)	1470 x 865 x 1345	1470 x 865 x 1345	1470 x 865 x 1345	1470 x 865 x 1345
Peso vuoto	Weight	270Kg	440Kg (Batterie + Charger)	275Kg (Charger)	310Kg
Batteria Pb/acido	Battery Lead/acid	24V /220Ah (NO)	24V /220Ah (SI)	24V /220Ah (NO)	25,6V /160Ah LITHIUM (SI)
Carica batteria (24V-25Ah)	Battery Charger (24V-25Ah)	NO	SI	SI	SI

Standard Accessories

	DESCRIPTION	CODE
1	Polypropilene brush PP 0,6mm	CPSP1617

Options

	DESCRIPTION	CODE
2	Soft brush PP 0,3mm	CPSP161703
3	Medium brush PP 0,9mm	CPSP161709
4	Hard brush	CPSP161712
5	Pad holder	CPPA1617
6	Red microfiber disc	CPDM016R
7	Brown microfiber disc	CPDM016M
8	White microfiber disc	CPDM016W
9	Fludeed battery 6V 205Ah(C5) KIT*4 pcs	ZBA6210P4 (standard for NIK85BTC)
10	Battery recharge 24V 25A	ZCC2425SC (standard for NIK85BTC and NIK8TCB)
11	Gel Battery 6V - 180Ah (C5)	ZBA6180G
12	Lithium Battery pack 25,6V - 160Ah	ZBA25160LI (only for NIK85BTCLI)
13	CDS Electronic detergent control	LAKD001
14	Automatic water charger system LAUB	LAKIT001


1


2


3


4


5


6


7


8

cod.: ZBA6210P


9


10



11


12

DEC SYSTEM

13


14



BOX: 100 x 160 x 160 H cm

PROFESSIONAL FLOOR SCRUBBER

DOWNLOAD CATALOGUE

LMA
ELSFA GROUP
THE FUTURE OF GRINDING

Via Teramo, 11, 65024
Manoppello Scalo (PE) Italy
T. +39 085 8562076 / +39 085 8121061
mob / whatsApp +39 329 4715858
email: info@lmamachine.com
www.lmamachine.com